PERFECT

2216 Flexible LED Strip

2216 LED Strip [120LED/M]

CRI 90-95



- DC12V/24V
- 9.6W/M
- 720Lm/m

IP Rank	IP20	IP50	IP65	IP66	IP67	IP68

CE certificate · UL E480045 ul certificate · 3 SDCM 3 step · 35000 up to 35000 hours · 3 Years 3 years warranty · 120° 120 viewing angle · Indoor for indoor use · 5M/Roll 5M Roll

Electrical & Optical Data


Dimension	5000*10*0.2MM
Unit Length	25MM(3LED)/50MM(6LED)
Power	48W(9.6W/M)
LED quality	600LED
Voltage	12V/24V
Current	4A / 2A
Ambient temperature	-20°C - 45°C

Practical Application




Model.NO	Color	Color Temp.	Lumens Flux
PSB601F PSB602F	Warm white Natural white Cool white Red Yellow Green Blue	1800K 2300K 2700K 3000K 3500K 4000K 5000K 6000K	720Lm/M


Assembly & Measurement

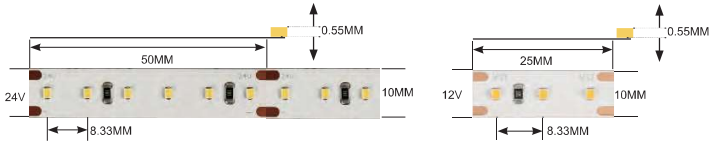

PhotometricDiagrams



Illuminance Distribution



Profiles

